


### Boot

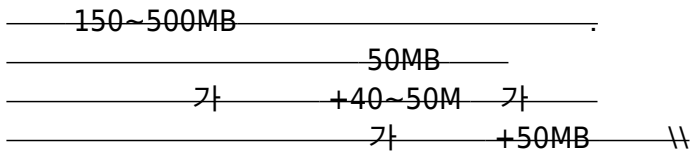

/boot grub .

```
grub-mkconfig -o /boot/grub/grub.cfg
```

/boot 가 ( "root=" ) .

/boot "root=" 가 가 .

### Home

X 가 .

```
# Add an "alert" alias for long running commands. Use like so:
# sleep 10; alert
if [ "$(lsb-release -s -i)" == "Linuxmint" ]; then
    alias alert='notify-send --urgency=low -i "[ $? = 0 ] && echo
terminal || echo error)" "$(history|tail -n1|sed -e
\'\'s/^\s*[0-9]\+\s*//;s/[;&]\s*alert$//\'\'')'
fi

## For LFS user
#if [ "$(lsb_release -c -s)" == "Bae Chanyil" ]; then
    if [ -f /etc/bashrc ]; then
        source /etc/bashrc
    fi

    if [ -d ~/.profile.d ]; then
        for config in ~/.profile.d/*; do source "$config"; done
    fi
#fi

## For Gentoo Linux user
if [ "$(lsb-release -s -i)" == "Gentoo" ]; then
    if [ -f /var/db/repos/gentoo/metadata/timestamp.chk ]; then
        LastSync="$(cat
/var/db/repos/gentoo/metadata/timestamp.chk)"
```

```
fi      echo -e "Last Sync Date: ${Green}$LastSync${Color_Off}"  
fi
```

From:  
<https://www.gamu.kr/dokuwiki/> -

Permanent link:  
<https://www.gamu.kr/dokuwiki/homeserverwithdebian/partition?rev=1715333844>

Last update: **2024/05/10 09:37**

