

SSH

가

1. Polkit

/etc/polkit-1/rules.d/10-ssh-keepgoing.rules

```

polkit.addRule(function(action, subject) {
  if (action.id == "org.freedesktop.login1.inhibit-block-idle" ||
      action.id == "org.freedesktop.login1.inhibit-block-sleep") {
    if (subject.isInGroup("<YOUR GROUP>") || subject.user == "<YOUR USER
ID>") {
      return polkit.Result.YES;
    }
  }
});

```


2. Bash startup script

~/.bash_login ~/.bash_profile, ~/.profile

```

# SSH                    ,            inhibit
if [ -n "$SSH_CONNECTION" ] && [ -z "$SYSTEMD_INHIBIT_ACTIVE" ]; then
  export SYSTEMD_INHIBIT_ACTIVE=1
  exec systemd-inhibit --what=idle:sleep \
                       --who="SSH-Session-$USER" \
                       --why="Active remote session" \
                       /usr/bin/bash --login
fi

```

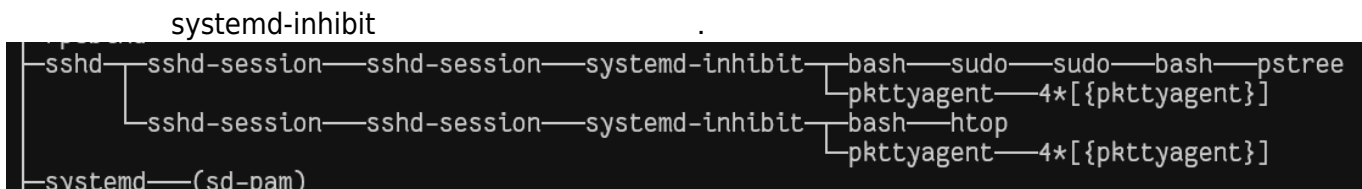

From: <https://www.gamu.kr/dokuwiki/> -

Permanent link: https://www.gamu.kr/dokuwiki/prevents_entering_a_waiting_state_during_an_ssh_session_connection

Last update: 2026/04/04 17:52

